

# Stacked Washer-Extractor/Tumble Dryer



PSG30 - PSG50

PSG  
RANGE



## FEATURES


- Ideal for limited space settings
- Increases wash capacity
- Improves throughput
- Minimal front fasteners give quick access to key washer-extractor components to improve serviceability
- Supports a higher volume than typical retail and light commercial products are able to support
- More than double production with higher capacity and faster wash times
- Reliability and durability that drastically outperforms retail or light commercial options

## Maximize Time and Space

PRIMUS stacked washer-extractor/tumble dryer is a unique product that truly delivers increased productivity. Featuring the Xtronic Touch Control.

## PLATFORM: XCONTROLFLEX

- Available with XControl FLEX
- 7" (5" on stack tumbler dryers), full color, touch screen display
- Clear step-by-step instructions available in 34 languages
- Machine programming & performance data accessible through cloud. Remotely access to live machine data on mobile device
- VEND:
  - » 5 standard dry programmes (High, Medium, Low, Delicate, No Heat)
  - » 11 easy-to-use cycle modifier
- Count up timer
- Over-the-air updates

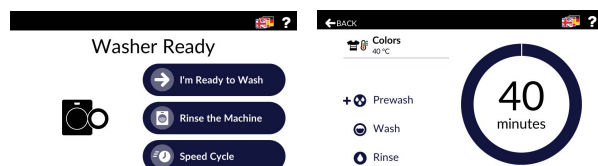

# Stacked Washer-Extractor/Tumble Dryer

## Specifications

		PSG30		PSG50		
		Washer-Extractor	Tumble Dryer	Washer-Extractor	Tumble Dryer	
Control Option		XControl FLEX		XControl FLEX		
Capacity - lb (kg)		30 (13.6) x 2		50 (23) x 2		
Overall Width - in (mm)		31.4 (797)		34.4 (875)		
Overall Depth - in (mm)		45.5 (1152)		51.3 (1302)		
Overall Height - in (mm)		79.7 (2023)		84.3 (2141)		
Cylinder Diameter - in (mm)		24.0 (610)	30.0 (762)	26.3 (668)	33.0 (838)	
Cylinder Depth - in (mm)		16.0 (406)	26.0 (660)	20.3 (515)	30.0 (762)	
Cylinder Volume - cu. ft (liters)		4.2 (119)	10.6 (300)	6.3 (178)	14.8 (419)	
Reversing Cylinder		-	Standard	-	Standard	
Door Opening Size - in (mm)		14.3 (363)	22.6 (574)	16.3 (414)	26.9 (683)	
Door Bottom to Floor - in (mm)		14.0 (356)	51.3 (1303)	14.6 (370)	52.3 (1328)	
Water Inlet Connection - in (mm)		2 x 0.75 (19)	-	2 x 0.75 (19)	-	
Drain Diameter - in (mm)		1 x 3 (76)	-	1 x 3 (76)	-	
Drain Height to Floor - in (mm)		4.3 (108)	-	4.5 (115)	-	
Heat Input Power - Btu/hr (kW, Mj/hr.)		- 73,000 (21.4, 77.0)		-	95,000 (27.8, 100)	
Gas Connection - in		-	1/2 NPT	-	1/2 NPT	
Air Outlet - in (mm)		-	8.0 (200) Elliptical	-	10.0 (250) Elliptical	
Airflow - cfm (l/sec)		-	400 (190)	-	600 (285)	
Motor - HP (kW)	Fan	-	0.5 (0.4)	-	0.5 (0.4)	
	Drive	1 (0.75)	0.3 (0.2)	2 (1.5)	0.5 (0.4)	
Total # of Speeds		9	-	9	-	
Cylinder Speeds - RPM (G-Force)	Gentle	34 (0.4)	-	33 (0.4)	-	
	Wash	48 (0.8)	-	46 (0.8)	-	
	Distribution	86 (2.5)	-	82 (2.5)	-	
	Very Low	282 (27)	-	269 (27)	-	
	Low	485 (80)	-	464 (80)	-	
	Medium	542 (100)	-	518 (100)	-	
	High	606 (125)	-	579 (125)	-	
	Ultra High	766 (200)	-	733 (200)	-	
Electrical Specs - amps	Gas X	200-240V/50/60/1/3	15	10	15	10
Shipping Dimensions Approx. - in (mm)	Width	34.5 (876)		35.5 (902)		
	Depth	47.0 (1194)		54.0 (1372)		
	Height	83.0 (2108)		89.0 (2261)		
Net Weight - lb (kg)		770 (349)		910 (413)		
Shipping Weight - lb (kg)		787 (357)		930 (422)		
Agency Approvals		CSA/UL/AGA/KTL/TISI		CSA/UL/AGA/KTL/TISI		