

NTLBXASP304NW26 Commercial Stacked Washer Dryer

STACK UNITS FEATURES

- Fully programmable control
- Totally freestanding: can be installed on any floor and any level
- Reduced floor space
- Top, front and side panels standard available in anthracite grey
- Door opens 180° for easy loading and unloading
- LED notification of the status of the program
- Programmable by Infra Red
- Time remaining countdown

WASHER-EXTRACTORS FEATURES

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimizing drying times and utility costs
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Standard with drain pump, drain valve optionally available
- Electrical heating or boiler-fed
- Soap supply injection allows easy connection with liquid soap pumps
- Longer lifetime: at least 15,000 cycles

DRYERS FEATURES


- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Electrical or gas heating



NTLBXASP304NW26 Commercial Stacked Washer Dryer

STACKED WASHER & DRYER SPECIFICATIONS

		Washer Extractor
CAPACITY	kg	10,5
DRUM VOLUME	l	96,8
MOTOR		
Frequency controlled	kW	0,67
EXTRACTION SPEED	rpm	1200
G-FACTOR		440
ELECTRICAL HEATING		
Electrical	kW	4,8

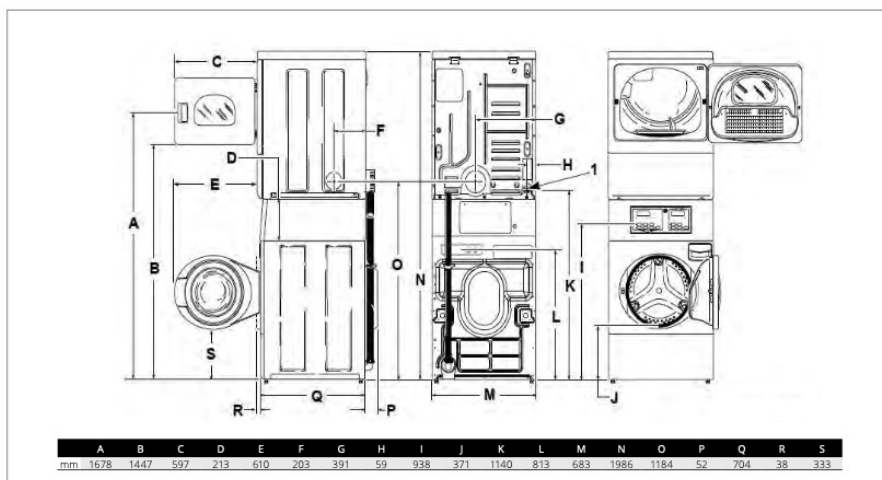

		Dryer
CAPACITY	kg	10,5
DRUM VOLUME	l	198
MOTOR		
Frequency controlled	kW	0,67
EXTRACTION SPEED	rpm	1200
G-FACTOR		440
ELECTRICAL HEATING	kW	5,2 (230V)
GAS HEATING	kW	7,3
MOTOR POWER	kW	0,25

Stacked Washer & Dryer		
HEATING		Gas
VOLTAGE		4220-240v/50Hz/1N
CONTROL TYPE		Quantum
CONTROL LOCATION		10° front control
COLOR		Stainless
BASKET		Stainless/Galvanized
DIMENSIONS H×W×D	mm	1986×683×704
Net weight	kg	177
TRANSPORT DATA		
Volume (packed)	m ³	1,25
Packed H×W×D	mm	2032×760×860
Gross weight	kg	193